
# **SQW** CONNECTOR

# Squib connectors

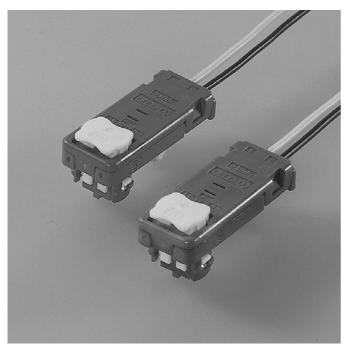

This connector for air-bag has intelligent CPA, which allows locking the connector, incomplete mating detection and release of short-circuit at the same time and achieves high resistance to noise at the specific frequency range with a built-in coil.

### Features

### Mating

Intelligent CPA adopted. It enables the connector to be locked securely and prevents incomplete mating on the assembly line resulting in improved connector retention force.

### ●Terminal construction


It is designed to prevent the deformation of the contact part when processing wire harness by protecting the contact part of each terminal with a box.

### Scooping (kojiri) preventive construction

Using a shunt ring with a countermeasure for scooping (kojiri), the resistance to scooping (kojiri) insertion and withdrawal is improved.

#### Noise suppression

High resistance to noise at the specific frequency range is achieved with a built-in coil.

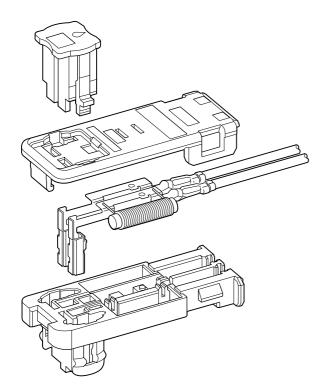

### **Specifications**

- Temperature range: -30°C to +80°C
  - (including temperature rise in applying electrical current)
- Insulation resistance: 100M $\Omega$  min.
- Applicable wire: 0.5mm<sup>2</sup>


Note: In principle, only SQW connector as harness-processed product is supplied due to built-in coil.

Contact JST for details of available wire harness specification.

- \* Compliant with ELV/RoHS.
- \* Contact JST for details.

# **SQW** CONNECTOR


### Female terminal

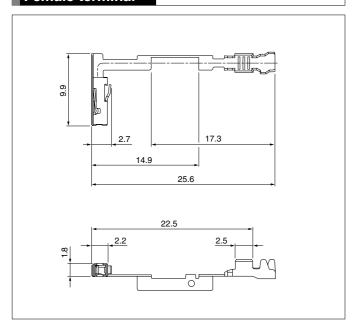


|                     | Applicable wire range |                      |           |
|---------------------|-----------------------|----------------------|-----------|
| Model No.           | Conductor<br>(mm²)    | Insulation O.D. (mm) | Q'ty/reel |
| SSQW-A03GI-P-P      | 0.5                   | 1.6                  | 5,000     |
| Material and Finish |                       |                      |           |

Copper alloy, nickel-undercoated, Contact area; gold-plated

### Female housing

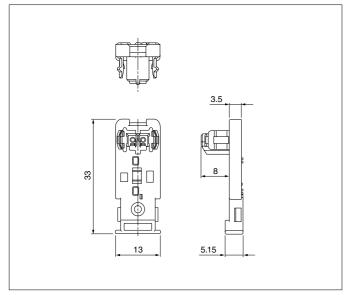

| Circuits | Model No.      | Q'ty/box | Color  |
|----------|----------------|----------|--------|
|          | SQWR-02H-1A-LP | 500      | Purple |
| 2        | SQWR-02H-1B-M  | 500      | Green  |
|          | SQWR-02H-1C-D  | 500      | Orange |
| Material |                |          |        |
| PBT      |                |          |        |

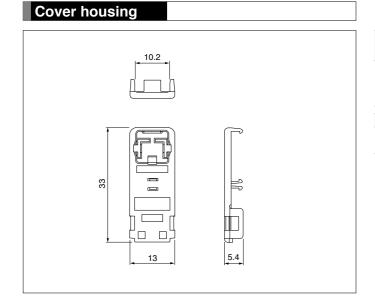


| Circuits | Model No.       | Q'ty/box | Color  |
|----------|-----------------|----------|--------|
| 2        | SQWL-02H-1-LP B | 500      | Purple |
|          | SQWL-02H-1-M A  | 500      | Green  |
|          | SQWL-02H-1-D    | 500      | Orange |

| Material |  |
|----------|--|
|          |  |
| PBT      |  |


# **SQW** CONNECTOR

# CPA housing

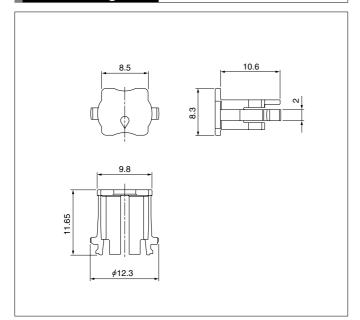

| Circuits         | Model No.     | Q'ty/bag | Color  |
|------------------|---------------|----------|--------|
| 2                | SQWC-02H-1A-Y | 2,000    | Yellow |
| Material         |               |          |        |
| Glass-filled PBT |               |          |        |

## Coil

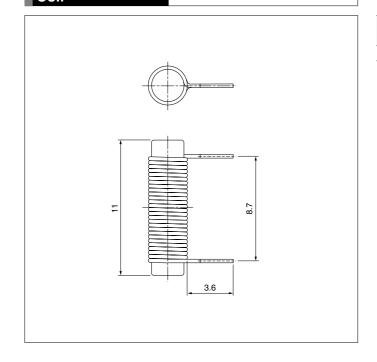

| Model No.  | Q'ty/box |
|------------|----------|
| SQWW-02-1A | _        |